


# DIN 908

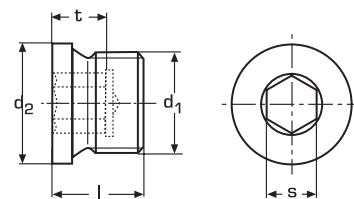

Korek walcowy z pierścieniem oporowym  
i sześciokątem wewnętrznym  
**A2 / A4**

d1	waga 100 szt. (kg)	d2	s	t	l	
<b>G 1/8" A</b>	0,634	14	5	5	11	100
<b>G 1/4" A</b>	1,460	18	6	7	15	100
<b>G 1/2" A</b>	4,080	26	10	7,5	18	50
<b>G 3/4" A</b>	7,350	32	12	9	20	20
<b>M 10x1</b>	0,634	14	5	5	11	100
<b>M 12x1,5</b>	1,130	17	6	7	15	100
<b>M 14x1,5</b>	1,600	19	6	7	15	100
<b>M 16x1,5</b>	1,900	21	8	7,5	15	50
<b>M 18x1,5</b>	2,830	23	8	7,5	16	50
<b>M 20x1,5</b>	3,750	25	10	7,5	18	50
<b>M 22x1,5</b>	4,750	29	10	7,5	18	25
<b>M 24x1,5</b>	5,350	31	12	7,5	18	25
<b>M 26x1,5</b>	6,870	32	12	9	20	25
<b>M 27x2</b>	7,350	36	12	9	20	25
<b>M 30x1,5</b>	8,400	17	17	9	20	25
<b>M 30x2</b>	8,400	12	17	9	20	25