


DIN 763



Łańcuch
A2 / A4

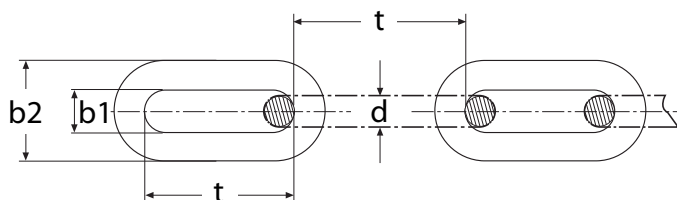


d	wytrzymałość (kg)	t	b1	b2
1,5	-	12,0	2,7	6,3
2	-	22,0	3,6	8,4
3	120	26,0	5,4	12,6
4	210	32,0	7,2	16,8
5	320	35,0	9,0	21,0
6	450	42,0	10,8	25,2
8	840	52,0	14,4	33,6
10	1260	65,0	18,0	42,0

DIN 766



Łańcuch
A2 / A4

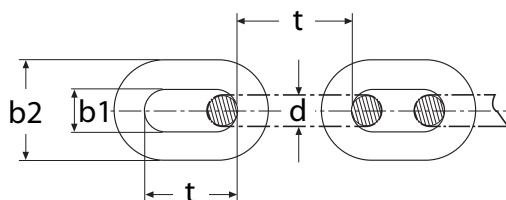

d	wytrzymałość (kg)	t	b1	b2
2	-	12,0	3,4	8,0
3	175	16,0	3,6	10,2
4	315	16,0	4,8	13,6
5	490	18,5	6,0	17,0
6	700	18,5	7,2	20,4
8	1200	24,0	9,6	27,2
10	1950	28,0	12,0	36,0