


DIN 125

**EN 27089
ISO 7089
PN 82006**

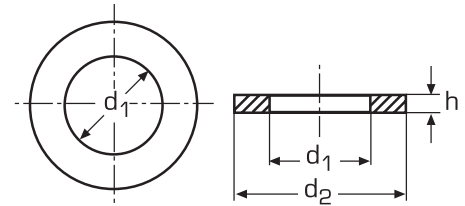

Podkładka płaska

Forma A

A2 / A4

| d1 | dla gwintu | waga 100 szt. (kg) | d2 | h | |
|------|------------|-----------------------|------|-----|------|
| 1,7 | M 1,6 | 0,003 | 4,0 | 0,3 | 1000 |
| 1,8 | M1,7 | 0,003 | 5,0 | 0,3 | 1000 |
| 2,2 | M 2 | 0,004 | 5,0 | 0,3 | 1000 |
| 2,5 | M 2,3 | 0,009 | 6,0 | 0,5 | 1000 |
| 2,7 | M 2,5 | 0,009 | 6,0 | 0,5 | 1000 |
| 2,8 | M 2,6 | 0,013 | 7,0 | 0,5 | 1000 |
| 3,2 | M 3 | 0,012 | 7,0 | 0,5 | 1000 |
| 3,7 | M 3,5 | 0,016 | 8,0 | 0,5 | 1000 |
| 4,3 | M 4 | 0,031 | 9,0 | 0,8 | 1000 |
| 5,3 | M 5 | 0,044 | 10,0 | 1,0 | 1000 |
| 6,4 | M 6 | 0,010 | 12,0 | 1,6 | 1000 |
| 7,4 | M 7 | 1,040 | 14,0 | 1,6 | 1000 |
| 8,4 | M 8 | 1,081 | 16,0 | 1,6 | 500 |
| 10,5 | M 10 | 0,360 | 20,0 | 2,0 | 500 |
| 13 | M 12 | 0,632 | 24,0 | 2,5 | 500 |
| 15 | M 14 | 0,860 | 28,0 | 2,5 | 200 |
| 17 | M 16 | 1,131 | 30,0 | 3,0 | 200 |
| 19 | M 18 | 1,470 | 34,0 | 3,0 | 200 |
| 21 | M 20 | 1,720 | 37,0 | 3,0 | 200 |
| 23 | M 22 | 1,831 | 39,0 | 3,0 | 100 |
| 25 | M 24 | 3,230 | 44,0 | 4,0 | 100 |
| 28 | M 27 | 4,232 | 50,0 | 4,0 | 50 |
| 31 | M 30 | 5,360 | 56,0 | 4,0 | 25 |
| 34 | M 33 | 7,530 | 60,0 | 5,0 | 25 |
| 37 | M 36 | 9,210 | 66,0 | 5,0 | 10 |
| 40 | M 39 | 13,300 | 72,0 | 6,0 | 10 |
| 43 | M 42 | 18,3001 | 78,0 | 7,0 | 10 |
| 46 | M 45 | 22,000 | 85,0 | 7,0 | 10 |
| 50 | M 48 | 29,400 | 92,0 | 8,0 | 10 |
| 52 | M 50 | 28,400 | 92,0 | 8,0 | 10 |
| 54 | M 52 | 33,000 | 98,0 | 8,0 | 10 |