


# DIN 913

**EN 24026  
ISO 4026  
PN 82314**

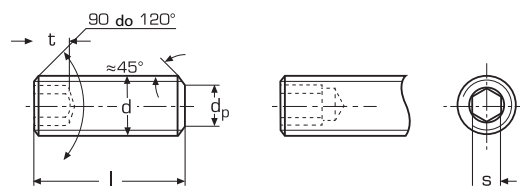

Wkręt dociskowy z końcem płaskim,  
z gniazdem sześciokątnym  
**A2 / A4**

<b>dp</b>	0,8	1,0	1,5	2,0	2,5	3,5	4,0	5,5	7,0	8,5	12,0	15,0
<b>t</b>	0,7	0,8	1,2	1,2	1,5	2,0	2,0	3,0	4,0	4,8	6,4	8,0
<b>e</b>	0,803	1,003	1,427	1,73	2,3	2,87	3,44	4,58	5,72	6,86	9,15	11,43
<b>s</b>	0,7	0,9	1,3	1,5	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0

<b>d1</b>	<b>M 1,6</b>	<b>M 2</b>	<b>M 2,5</b>	<b>M 3</b>	<b>M 4</b>	<b>M 5</b>	<b>M 6</b>	<b>M 8</b>	<b>M 10</b>	<b>M 12</b>	<b>M 16</b>	<b>M 20</b>
<b>1 2</b>		0,003										
<b>3</b>		0,004	0,008	0,010								
<b>4</b>		0,006	0,010	0,014	0,022		0,048					
<b>5</b>	0,005	0,007	0,012	0,018	0,030	0,044	0,042					
<b>6</b>		0,009	0,015	0,022	0,038	0,056	0,076	0,251				
<b>8</b>		0,012	0,020	0,031	0,053	0,080	0,111	0,286				
<b>10</b>		0,015	0,025	0,040	0,068	0,104	0,146	0,321	0,378			
<b>12</b>		0,018	0,030	0,049	0,083	0,128	0,181	0,409	0,478	0,600		
<b>14</b>				0,053	0,097	0,152		0,497				
<b>16</b>		0,020	0,040	0,067	0,113	0,176	0,251	0,585	0,678	0,960	1,603	
<b>18</b>							0,286	0,673				
<b>20</b>				0,085	0,143	0,224	0,321	0,750	0,876	1,240	2,150	3,230
<b>25</b>				0,103	0,175	0,284	0,409	1,000	1,120	1,600	2,800	4,260
<b>30</b>				0,130	0,207	0,344	0,497	0,922	1,370	1,960	3,460	5,290
<b>35</b>					0,264	0,404	0,585	1,007	1,620	2,320	4,110	6,320
<b>40</b>					0,323	0,464	0,673	1,177	1,870	2,680	4,770	7,350
<b>45</b>							0,750	1,360	2,120	3,040	5,440	8,380
<b>50</b>						0,464	1,000	1,520	2,370	3,387	6,090	9,410
<b>55</b>							0,922		2,620	3,560		
<b>60</b>							1,007	1,720	2,870	3,820	7,410	
<b>70</b>							1,177	2,145	3,000	4,840	8,700	
<b>80</b>								2,432	3,870	5,560	9,670	
<b>90</b>									4,370	6,280		
<b>100</b>										7,000		
	500	500	500	500	200	200	200	100	100	50	25	25

Waga 100 sztuk /kg