


DIN 571

PN 82501

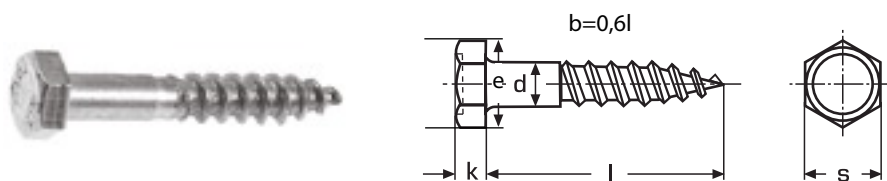

Wkręt do drewna z łbem sześciokątnym
A2 / A4

k	2,8	3,5	4,0	5,0	5,5	7,0	8,0	10,0
e	7,5	8,63	10,89	13,07	14,2	18,72	20,88	26,17
s	7,0	8,0	10,0	12,0	13,0	17,0	19,0	24,0

d	M 4	M 5	M 6	M 7	M 8	M 10	M 12	M 16
l 20	0,201	0,342	0,502					
25	0,241	0,402	0,582		1,150			
30	0,281	0,462	0,649	0,976	1,290			
35	0,311	0,512	0,742		1,420			
40	0,351	0,582	0,806	1,191	1,560	2,800		
45	0,400	0,569	0,894	1,300	1,690	3,000		
50		0,621	0,964	1,409	1,880	3,222	4,540	8,410
55		0,763	1,050	1,400	1,960	3,430		
60		0,823	1,120	1,665	2,130	3,702	5,180	9,490
65			1,190	1,930	2,220	3,850		
70		0,943	1,273	2,080	2,430	4,070	5,780	10,700
80		0,923	1,430	2,200	2,500	4,520	6,450	11,800
90			1,589	2,380	2,650	4,990	7,500	13,000
100			1,755	2,710	2,975	5,400	8,003	14,100
110			1,866	3,040	3,200	5,810	8,340	15,200
120			2,031	3,400	3,500	6,220	9,350	16,300
130			2,200	3,280	3,800	6,630	9,560	17,500
140			2,300	3,850	4,100	7,040	10,170	18,700
150				3,440	4,400	7,450	10,780	19,800
160				2,700	4,700	7,860	12,797	20,900
170				4,300	5,186	8,400		
180				4,428	5,400	8,330	14,305	
200					6,100	9,720	15,909	
220							15,500	
240							17,100	
250							17,900	
260							18,100	
280							19,800	
300							21,400	
	200	200	100	100	100 od l120 50	100 od l100 50	50 od l150 25	25

Waga 100 sztuk /kg